# **Network analyzers**

Network analyzers to monitor the main electrical measurements (TRMS)

# **ADR-D ADR-DE**

- Current (TRMS)
- Active, reactive and apparent power
- Active and reactive energy
- Frequency
- Power factor (cos φ)
- Phase angle





### Instrument to measure:

- Voltage (TRMS) (concatenated and phased)



## **ADR THREE-PHASE WITH RS-485 SERIAL OUTPUT**

- Possibility to view the system measurements and the maximum value recorded by the system measurement
- Storage of the peak values and related timing linked to the current timer
- Power supply: 230 V AC 50/60 Hz
- Backlit LCD display with 3 numeric fields
- CT and VT ratios selectable directly during programming
- Active energy meter zeroing
- Reactive energy meter zeroing
- ON/OFF or timed backlighting management
- RS-485 output for data communication with the possibility to view and file the measurements (ADR-view)


• Possibility of earthing the secondary ciruits of the CT (for ADR-D only)

#### Code Model Description VN563300 ADR-D Network analyzer with serial output RS-485 Uninsulated network analyzer with serial output RS-485 VE281200 ADR-D E

## ≡€Vemer


#### DIMENSIONS (mm) **CONNECTION DIAGRAM**

### Front view



### Side view



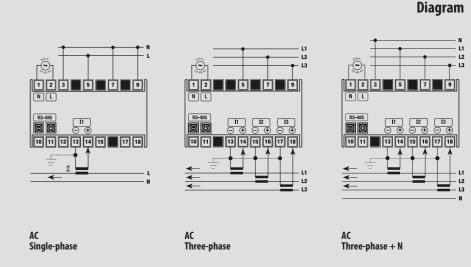

Attention: For the ADR-D E model the secondary circuits of the CT can not be earthed.

# **MEASUREMENT AND CONTROL**

### **TECHNICAL INFORMATION**

### **GENERAL CHARACTERISTICS**

Power supply	V AC	230 (-15% ÷ +10%)
Frequency	Hz	50 / 60
Absorption	VA	4
Display		backlit LCD
Front protection degree	IP	54
Voltage precision		0.5% f.s. + 1 digit
Current precision		0.5% f.s. + 1 digit
Power precision		1% f.s. + 1 digit
Frequency precision	Hz	±1
Active energy		Class 2
Reactive energy		Class 3

°C	0 ÷ +50
°C	-20 ÷ +60
	6 mm <sup>2</sup>
	Class VO complying with UL94 standard
	10 ÷ 90% non condensing
	550 V RMS (47 ÷ 63 Hz)
	VT 1 ÷ 9999 V
	CT 1 ÷ 9999 A

### **REFERENCE STANDARDS**

**≥**€Vemer

Compliance with Community Directives: 2006/95/EC (Low voltage) and 2004/108/EC (E.M.C.) is declared with reference to the following standards: • Safety: EN 61010-1 • E.M. Compatibility: EN 61000-6-2 / EN 61000-6-4

