



Grommet, degree of protection IP 65


	<p>EDK 20</p> <ul style="list-style-type: none"> Grommets for knockouts M 20 	
-----------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------

- sealing range: Ø 6-13 mm
- bore-hole: Ø 20.5 mm
- wall thickness 1.5-3.5 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60695-2-11: 750 °C
- colour: grey, RAL 7035
- degree of protection: IP 65

material	TPE (-25° to +80°C)
weight	0,003 kg
glow wire test	IEC 60695-2-11 750°C

Drawings

Dimension drawing

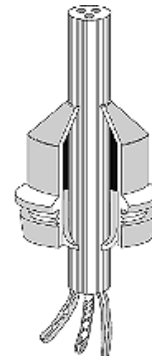

Operating and ambient conditions

Application area	Suitable for indoor installation and outdoor installation, protected against weather influences
Ambient temperature	Average value over 24 hours + 35 °C Maximum value + 40 °C Minimum value - 25 °C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire text in accordance with IEC 60695-2-11: - 650° C for boxes and cable glands
Burning behaviour	Glow wire test IEC 60695-2-11: 750 °C UL Subject 94: - flame-retardant self-extinguishing

Toxic behaviour

halogen-free
silicone-free
"halogen-free" in accordance with the examination of the
cables and insulated wires - corrosiveness of fumes - as
per IEC 60754-2

Note:

For material properties see technical data.