



Approved for intrinsic fire resistance, material: Thermoplastic


| | | |
|---|--|---|
|  | <p>EDKF 40</p> <ul style="list-style-type: none"> Grommets for knockouts M 40 |  |
|---|--|---|

- sealing range: Ø 11-30 mm
- bore-hole: Ø 40.5 mm
- wall thickness 1.5-3.5 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60695-2-11: 750 °C
- degree of protection: IP 65 / IP 66
- colour: orange, RAL 2003

| | |
|----------------|----------------------|
| material | TPE (-25° to +80°C) |
| weight | 0,009 kg |
| glow wire test | IEC 60695-2-11 750°C |

Drawings

Dimension drawing

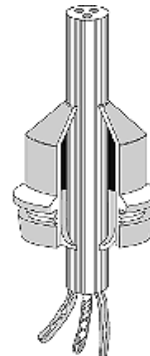

Operating and ambient conditions

| | |
|---|--|
| Application area | Suitable for indoor installation and outdoor installation, protected against weather influences |
| Ambient temperature | Average value over 24 hours + 35 °C Maximum value + 40 °C Minimum value - 25 °C |
| Fire protection in the event of internal faults | Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire text in accordance with IEC 60695-2-11: - 650° C for boxes and cable glands |
| Burning behaviour | Glow wire test IEC 60695-2-11: 750 °C UL Subject 94: - flame-retardant self-extinguishing |

Toxic behaviour

halogen-free
silicone-free
"halogen-free" in accordance with the examination of the
cables and insulated wires - corrosiveness of fumes - as
per IEC 60754-2

Note:

For material properties see technical data.