


Energy meters

ENERGY-230 MICRO

Static energy meters to view the consumption of active energy in 230 V single-phase systems.

- 1 "Flashing" Red Led:
active energy consumption
2000 flashes every kWh
- 2 Non zeroable total energy meter

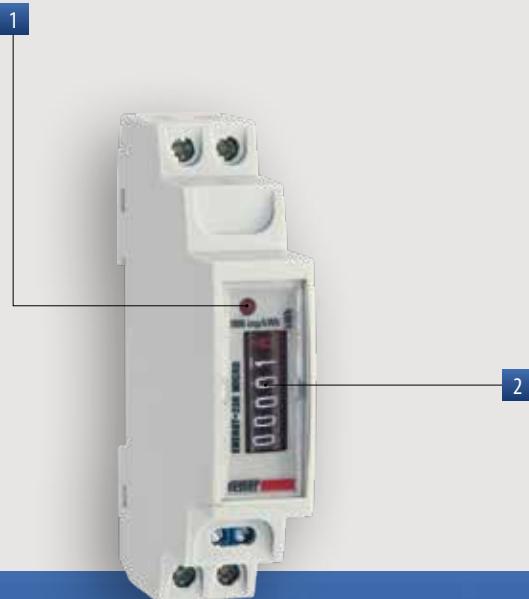

DIRECT CONNECTION SINGLE-PHASE METER

- Power supply: 230V AC (-15% ÷ +10%)
- Fastening: DIN rail
- Class 1 index
- Max measureable current: 25 A
- Static meter with direct connection max 25 A
- Electromechanic numerator with 5 digits + decimal
- Active energy consumption indication 2000 flashes every kWh
- 1 DIN module format
- Optoisolated pulse output

Code	Model	Description
VE321600	Energy-230 Micro	Active single-phase energy meter



GENERAL CHARACTERISTICS


Power supply	V AC	230 (-15 ÷ +10%)
Frequency	Hz	50 / 60
Reading resolution	kWh	0.1
Precision		Classe 1 (CEI EN 62053-21)
Absorption	VA	0.5
Base current	A	5
Maximum current	A	25
Starting current	mA	20
Optoisolated pulse output	- pulse weight	2000 imp/kWh
	- pulse duration	ms 30
	- pulse voltage	VDC 18 ÷ 27
	- maximum current	mA 27
Operating temperature	°C	-20 ÷ +50
Storage temperature	°C	-25 ÷ +70
Operating humidity		20 ÷ 90%
Protection degree		non condensing IP20

REFERENCE STANDARDS


Compliance with Community Directives: 2014/35/EU (LVD) and 2014/30/EU (EMCD)
is declared in reference to the following Standards: EN 61010-1 • EN 61000-6-2 and EN 61000-6-4

DIMENSIONS (mm)

Front view



Side view



CONNECTION DIAGRAM

