


## PE and N terminals

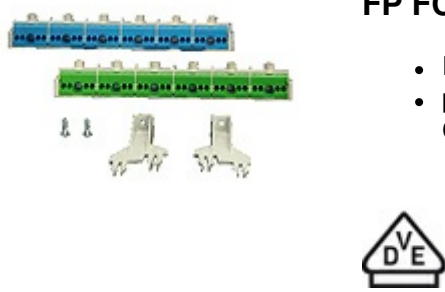

**FP FC 36**

- PE and N terminal
- per PE/N 6 x 25 mm<sup>2</sup>, 24 x 4 mm<sup>2</sup>, Cu

- for enclosures with 3 x 12 modules
- FIXCONNECT® plug-in terminal technology, for terminal technology refer to technical data
- N separable, up to 4 different potentials
- with fastening material
- current carrying capacity: 75 A

|                          |   |
|--------------------------|---|
| rated insulation voltage | U <sub>i</sub> = 690 V a.c.   |
| conductor cross section  | f 2 x 1 x 1,5-25 mm <sup>2</sup><br>r/f 2 x 1 x 10-25 mm <sup>2</sup><br>sol 2 x 1 x 3 x 6 mm <sup>2</sup><br>sol 2 x 1 x 4 x 4 mm <sup>2</sup> |
| conductor cross section  | sol 2 x 1 x 6 x 2,5 mm <sup>2</sup><br>sol 2 x 1 x 6 x 1,5 mm <sup>2</sup><br>sol/f 8 x 1 x 1,5-4 mm <sup>2</sup>                               |
| colour:                  | green / blue  |
| weight                   | 0,316 kg  |