

Double-level terminal with electronic components, Push-in connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm², Width: 5.1 mm, Colour: Beige

Kaufmännische Daten

Artikelnummer	<u>3237.2</u>
Artikelbezeichnung	FRKD 2,5/LED1(RD) 24V DC BG
GTIN (EAN)	4044211131876
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	14.2 g
Weight per piece (including packaging)	15.17 g
Unit of weight	G
Customs number	85369010
Country of origin	BG
Product description	Double-level terminals with electronic components
Colour	Beige

3237.2 FRKD 2,5/LED1(RD) 24V DC BG

Technische Daten

Dimensions

Length	75.4 mm
Width	5.1 mm
Height TS 35/7.5	53 mm

Ratings

Rated voltage	24 V
Rated current	24 A
Rated cross-section	2.5 mm ²
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3

Connection data

Connection principle	Push-in connection
Connection position	Top
Connections	2 x 2
Number of terminals per level	2
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm ²
Wire cross-section single core (rigid)/stranded, max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Wire cross-section AWG, min.	26
Wire cross-section AWG, max.	14
Stripping length	12 mm

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

Technische Daten

Further technical data

Mounting type	Mounting rail TS 35/7,5
Gauge plug acc. to EN 60 947-1	A3
Number of cross-connection channels	1
Voltage illuminated display	24 V
Cross-current via illuminated display	5 mA

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

Zulassungen

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	yes
----------------------	-----

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	yes
----------------------	-----

CSA Usegroup B: rated voltage	300 V
-------------------------------	-------

CSA Usegroup B: rated current	20 A
-------------------------------	------

CSA Usegroup C: rated voltage	300 V
-------------------------------	-------

CSA Usegroup C: rated current	20 A
-------------------------------	------

CSA Usegroup D: rated voltage	600 V
-------------------------------	-------

CSA Usegroup D: rated current	5 A
-------------------------------	-----

CSA wire cross-section AWG, min.	26
----------------------------------	----

CSA wire cross-section AWG, max.	12
----------------------------------	----

CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	yes
------------------------	-----

CSAus Usegroup B: rated voltage	300 V
---------------------------------	-------

CSAus Usegroup B: rated current	20 A
---------------------------------	------

CSAus Usegroup C: rated voltage	300 V
---------------------------------	-------

CSAus Usegroup C: rated current	20 A
---------------------------------	------

CSAus Usegroup D: rated voltage	600 V
---------------------------------	-------

CSAus Usegroup D: rated current	5 A
---------------------------------	-----

CSAus wire cross-section AWG, min.	26
------------------------------------	----



CSAus wire cross-section AWG, max.	12
------------------------------------	----

Zulassungen

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1:2009
KEMA KEUR approval granted	yes
KEMA rated voltage	24 V
KEMA rated current	24 A
KEMA rated current (diode)	24 A
KEMA rated impulse voltage	6 kV
KEMA wire cross-section single core (rigid), min.	0.2 mm ²
KEMA wire cross-section single-core (rigid), max.	4 mm ²
KEMA wire cross-section stranded, min.	0.2 mm ²
KEMA wire cross-section stranded, max.	4 mm ²
KEMA wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
KEMA wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²

Medien

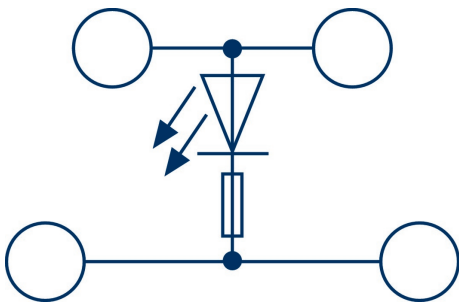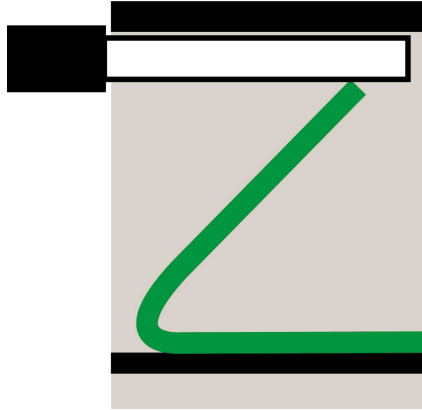

Zubehör

End plate



End plate, Width: 1.5 mm, Colour: Beige

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>3423.2</u>	FAPD 2,5 BG	4044211130169	20

End stop



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 5 mm, Colour: Beige

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>3811.2</u>	ZES 35/2 BG	4044211080600	50

Insulated cross-connector



Insulated cross-connector, No. of poles: 8, Mounting type: Plug in, Width: 40.7 mm, Colour: Yellow

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>3468.8</u>	FQI 2,5/8 YE	4044211110796	10



Insulated cross-connector, No. of poles: 9, Mounting type: Plug in, Width: 45.8 mm, Colour: Yellow

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>3469.8</u>	FQI 2,5/9 YE	4044211110802	10



Insulated cross-connector, No. of poles: 7, Mounting type: Plug in, Width: 35.6 mm, Colour: Yellow

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>3467.8</u>	FQI 2,5/7 YE	4044211110789	20

3237.2 FRKD 2,5/LED1(RD) 24V DC BG

Insulated cross-connector



Insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 20.3 mm, Colour: Yellow

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>3464.8</u>	FQI 2,5/4 YE	4044211110758	20



Insulated cross-connector, No. of poles: 5, Mounting type: Plug in, Width: 25.4 mm, Colour: Yellow

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>3465.8</u>	FQI 2,5/5 YE	4044211110765	20



Insulated cross-connector, No. of poles: 6, Mounting type: Plug in, Width: 30.5 mm, Colour: Yellow

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>3466.8</u>	FQI 2,5/6 YE	4044211110772	20



Insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 50.9 mm, Colour: Yellow

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>3460.8</u>	FQI 2,5/10 YE	4044211110727	10



Insulated cross-connector, No. of poles: 3, Mounting type: Plug in, Width: 15.2 mm, Colour: Yellow

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>3463.8</u>	FQI 2,5/3 YE	4044211110741	50



Insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 10.1 mm, Colour: Yellow

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>3462.8</u>	FQI 2,5/2 YE	4044211110734	50

Quick marking

3237.2 FRKD 2,5/LED1(RD) 24V DC BG



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 5 mm, Colour: White

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>4600.7</u>	PMC SB 5/50 WH	4044211088903	500 ST

Screwdriver



Screwdriver with bare blade, Colour:

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>3164.0</u>	SDB 0,4x2,0	4044211107246	1 ST

Four-way cover



Cover, Length: 3.4 mm, Width: 19.8 mm, Colour: Yellow

Artikelnummer	Artikelbezeichnung	GTIN (EAN)	VPE
<u>3426.8</u>	FAD 2,5/4/B YE	4044211132934	20 ST