


GMK-M | for metric threads

Accessories

Counternut especially for metric plastic threads

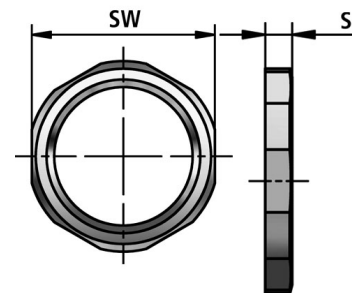

Temperature: -40 °C ... +100°C

Material: polyamide, fibre-glass reinforced

CHARACTERISTICS:

- Properties: resistant against light acids and soft lyes
- resistant against sea water, benzine and mineral oil



Characteristics	Unit	Value	Test
Thermal characteristics			
Temperature range	°C	-40 °C ... +100°C	

FLEXA No.	Thread type	Colour	S [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
10309000210	M 10 x 1,5	Black	3,0	14	0,040	100
10309000212	M 12 x 1,5	Black	5,0	17	0,100	100
10309000216	M 16 x 1,5	Black	5,0	22	0,150	100
10309000220	M 20 x 1,5	Black	6,0	26	0,230	100
10309000225	M 25 x 1,5	Black	6,0	32	0,260	100
10309000232	M 32 x 1,5	Black	7,0	41	0,380	100
10309000240	M 40 x 1,5	Black	7,0	50	0,660	50
10309000250	M 50 x 1,5	Black	8,0	60	1,080	25
10309000263	M 63 x 1,5	Black	8,0	75	1,900	10
10309000012	M 12 x 1,5	Grey	5,0	17	0,100	100
10309000016	M 16 x 1,5	Grey	5,0	22	0,150	100
10309000020	M 20 x 1,5	Grey	6,0	26	0,230	100
10309000025	M 25 x 1,5	Grey	6,0	32	0,260	100
10309000032	M 32 x 1,5	Grey	7,0	41	0,380	100
10309000040	M 40 x 1,5	Grey	7,0	50	0,660	50
10309000050	M 50 x 1,5	Grey	8,0	60	1,080	25
10309000063	M 63 x 1,5	Grey	8,0	75	1,900	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.