


17007.2 HSK 120/M10 B/B BG

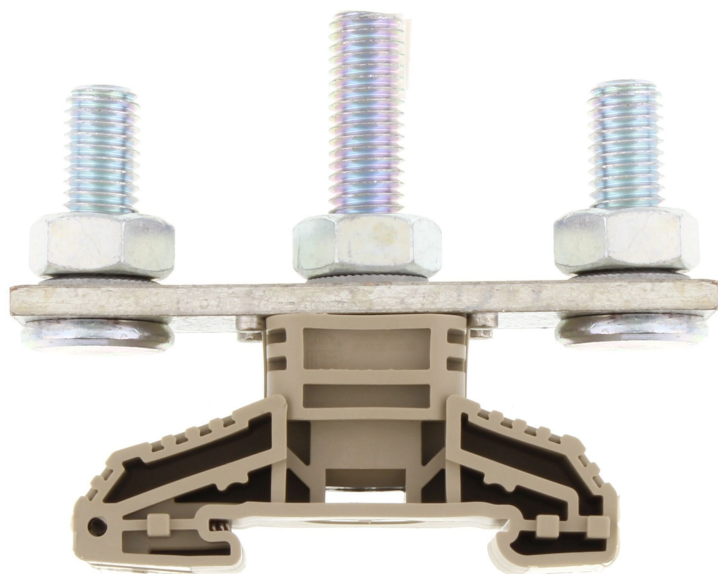

High-power stud terminal, Stud connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 120 mm², Width: 32 mm, Colour: Beige

Business data

| | |
|--|--------------------------|
| Article number | <u>17007.2</u> |
| Article name | HSK 120/M10 B/B BG |
| GTIN (EAN) | 4044211131524 |
| Packaging unit | 10 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 214 g |
| Weight per piece (including packaging) | 220.9 g |
| Unit of weight | G |
| Customs number | 85369010 |
| Country of origin | DE |
| Product description | High-power stud terminal |
| Colour | Beige |

Technical data

Dimensions

| | |
|------------------------------|---------|
| Length | 67 mm |
| Length with TW/ADH | 156 mm |
| Width | 32 mm |
| Height TS 35/7.5 | 73.5 mm |
| Height TS 35/7.5 with TW/ADH | 78.5 mm |

Ratings

| | |
|---|---------------------|
| Rated voltage | 1000 V |
| Rated current | 269 A |
| Rated cross-section | 120 mm ² |
| Rated impulse voltage | 8 kV |
| Overvoltage category | III |
| Contamination degree | 3 |
| Maximum power dissipation for nominal condition | 8.61 W |

Connection data

| | |
|-------------------------------|-----------------------|
| Connection principle | Stud connection |
| Connection position | Top |
| Connections | 2 |
| Number of terminals per level | 2 |
| Number of levels | 1 |
| Wire cross-section AWG, min. | 10 |
| Wire cross-section AWG, max. | 250 Kcmil |
| Bolt head | Hexagon |
| Bolt thread | M 10 |
| Tightening torque, min. | 10 Nm |
| Tightening torque, max. | 20 Nm |
| Contact wire range | ≤ 120 mm ² |

Materials

| | |
|---------------------------|---------------|
| Insulation housing | Polyamide 6.6 |
| Flammability class UL 94 | V-0 |
| Working temperature, min. | -40 °C |
| Working temperature, max. | 120 °C |

Technical data

Further technical data

| | |
|---|-------------------------|
| Mounting type | Mounting rail TS 35/7,5 |
| Number of cross-connection channels | 1 |
| DIN 46234 / 1 cable lug per side, min. | 6 mm ² |
| DIN 46234 / 1 cable lug per side, max. | 120 mm ² |
| DIN 46234 / 2 cable lugs per side, min. | 6 mm ² |
| DIN 46234 / 2 cable lugs per side, max. | 120 mm ² |
| DIN 46235: 1 cable lug per side, max. | 95 mm ² |
| DIN 46235: 1 cable lug per side, min. | 10 mm ² |
| DIN 46235: 2 cable lugs per side, min. | 10 mm ² |
| DIN 46235: 2 cable lugs per side, max. | 95 mm ² |

Environmental Product Compliance

| | |
|--------------------------------|------------|
| REACH Conform | yes |
| REACH Reference date | 2023-06-14 |
| REACH Candidate Substance Note | No |
| RoHS Conform | yes |

Approvals

Standards and regulations

| | |
|--------------|----------------|
| EAC approval | TR ZU 004/2011 |
|--------------|----------------|

| | |
|----------------------|-----|
| EAC approval granted | yes |
|----------------------|-----|

CSA approval

| | |
|--------------|--------------|
| CSA approval | C22.2 No 158 |
|--------------|--------------|

| | |
|----------------------|-----|
| CSA approval granted | yes |
|----------------------|-----|

| | |
|-------------------------------|--------|
| CSA Usegroup C: rated voltage | 1000 V |
|-------------------------------|--------|

| | |
|-------------------------------|-------|
| CSA Usegroup C: rated current | 225 A |
|-------------------------------|-------|

| | |
|-------------------------------|--------|
| CSA Usegroup D: rated voltage | 1000 V |
|-------------------------------|--------|

| | |
|-------------------------------|-------|
| CSA Usegroup D: rated current | 220 A |
|-------------------------------|-------|

| | |
|----------------------------------|-----|
| CSA wire cross-section AWG, max. | 2/0 |
|----------------------------------|-----|

| | |
|------------------|---------|
| CSA torque, max. | 20.3 Nm |
|------------------|---------|

CSAus approval

| | |
|----------------|---------|
| CSAus approval | UL 1059 |
|----------------|---------|

| | |
|------------------------|-----|
| CSAus approval granted | yes |
|------------------------|-----|

| | |
|---------------------------------|--------|
| CSAus Usegroup C: rated voltage | 1000 V |
|---------------------------------|--------|

| | |
|---------------------------------|-------|
| CSAus Usegroup C: rated current | 225 A |
|---------------------------------|-------|

| | |
|---------------------------------|--------|
| CSAus Usegroup D: rated voltage | 1000 V |
|---------------------------------|--------|

| | |
|---------------------------------|-------|
| CSAus Usegroup D: rated current | 220 A |
|---------------------------------|-------|

| | |
|------------------------------------|-----|
| CSAus wire cross-section AWG, max. | 2/0 |
|------------------------------------|-----|

| | |
|--------------------|---------|
| CSAus torque, max. | 20.3 Nm |
|--------------------|---------|

cUL Recognized

| | |
|--------------|--------------|
| cUL approval | C22.2 No 158 |
|--------------|--------------|

| | |
|-------------------------------|--------|
| cUL Usegroup E: rated voltage | 1000 V |
|-------------------------------|--------|

| | |
|-------------------------------|-------|
| cUL Usegroup E: rated current | 225 A |
|-------------------------------|-------|

| | |
|----------------------------------|-----------|
| cUL wire cross-section AWG, max. | 250 Kcmil |
|----------------------------------|-----------|

| | |
|------------------|---------|
| cUL torque, max. | 20.3 Nm |
|------------------|---------|

| | |
|-------------------|----|
| cUL wire material | Cu |
|-------------------|----|

| | |
|----------------|---|
| cUL Recognized | 1 |
|----------------|---|

Approvals


KEMA KEUR approval

| | |
|---|---------------------|
| KEMA KEUR approval | EN 60947-7-1:2009 |
| KEMA KEUR approval granted | yes |
| KEMA rated voltage | 1000 V |
| KEMA rated current | 269 A |
| KEMA rated impulse voltage | 8 kV |
| KEMA wire cross-section (DIN 46234), min. | 6 mm ² |
| KEMA wire cross-section (DIN 46234), max. | 120 mm ² |
| KEMA wire cross-section (DIN 46235), min. | 10 mm ² |
| KEMA wire cross-section (DIN 46235), max. | 95 mm ² |

UL Recognized

| | |
|---------------------------------|--------------|
| UL approval | UL 1059 |
| UL Usegroup E: rated voltage | 1000 V |
| UL Usegroup E: rated current | 255 A |
| UL wire cross-section AWG, max. | 250 Kcmil |
| UL torque, max. | 179.7 Lb In. |
| UL wire material | Cu |
| UL factory wiring | 1 |
| UL field wiring | 1 |
| UL Recognized | 1 |

Media

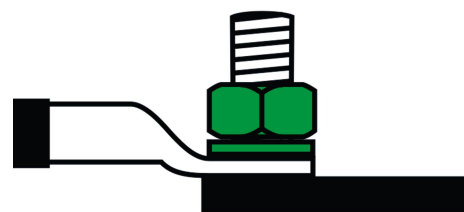

17007.2 HSK 120/M10 B/B BG

Accessories


Protective hood



Cover profile, Length: 156 mm, Width: 32 mm, Colour: Yellow

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>17026.8</u> | AD 120 YE | 4044211131715 | 20 ST |

End stop



End stop, Mounting type: Mounting rail TS 35/7.5, Width: 9.5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|---------------|---------------|----------------|
| <u>2828.0</u> | ES 35/K/ST BG | 4044211055547 | 50 |

Cross-connector



Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 62 mm, Rated cross-section: 120 mm², Colour: natural

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>17014.0</u> | QS 2/120/10 | 4044211131609 | 10 ST |



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 82 mm, Rated cross-section: 35 mm², Colour: natural

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|------------------------|---------------|----------------|
| <u>17029.2</u> | QS 3 HSK 35/M6 - M10/2 | 4044211139742 | 1 ST |




Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 96 mm, Rated cross-section: 120 mm², Colour: natural

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>17015.0</u> | QS 3/120/10 | 4044211131593 | 10 ST |

17007.2 HSK 120/M10 B/B BG

Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 6 mm, Colour: White

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|----------------|---------------|----------------|
| <u>4702.7</u> | PMC SB 6/50 WH | 4044211089986 | 500 ST |

Partition plate



Partition plate, Width: 2 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|------------------|---------------|----------------|
| <u>17022.2</u> | TW 35-120/B/B BG | 4044211131678 | 20 ST |