

Business data

| | |
|--|--------------------------------------|
| Article number | 6151.2 |
| Article name | IF-OF/3A |
| GTIN (EAN) | 4044211072353 |
| Packaging unit | 1 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 90 g |
| Weight per piece (including packaging) | 129 g |
| Unit of weight | G |
| Customs number | 85363010 |
| Country of origin | NL |
| Product description | Interference-elimination link module |

Technical data

Dimensions

| | |
|--------|-------|
| Length | 40 mm |
| Width | 87 mm |
| Height | 60 mm |

Ratings

| | |
|----------------------------|-------|
| Operating voltage AC, max. | 250 V |
| Current, max. | 3 A |
| Overvoltage category | III |
| Contamination degree | 2 |
| Operating voltage DC | 250 V |

Connection data

| | |
|--|---------------------|
| Connection principle | Screw connection |
| Wire cross-section single core (rigid), min. | 0.2 mm ² |
| Wire cross-section single-core (rigid), max. | 4 mm ² |
| Wire cross-section stranded, min. | 0.2 mm ² |
| Wire cross-section stranded, max. | 2.5 mm ² |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm ² |
| Wire cross-section stranded with wire-end ferrules, max. | 2.5 mm ² |
| Stripping length | 7 mm |

Input data

| | |
|-----------|--------|
| Frequency | 400 Hz |
|-----------|--------|

Materials

| | |
|---------------------------|--------|
| Working temperature, min. | -20 °C |
| Working temperature, max. | 50 °C |

Further technical data

| | |
|-------------------|-------------------|
| Throttle | 2 mH |
| Test voltage N-PE | 2 kV / 50 Hz >2 s |
| Test voltage L-PE | 2 kV / 50 Hz >2 s |
| Leakage current | 2 x 0,2 mA |

Technical data

Environmental Product Compliance

| | |
|--------------------------------|------------|
| REACH Conform | yes |
| REACH Reference date | 2023-06-14 |
| REACH Candidate Substance Note | No |
| RoHS Conform | yes |

Data sheet

6151.2 IF-OF/3A



Approvals

Standards and regulations


Standards / specifications

DIN EN 50178 / DIN VDE 0110

Data sheet

6151.2 IF-OF/3A

Media

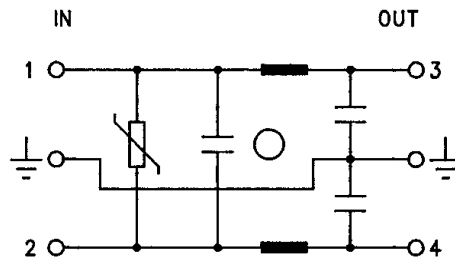

Accessories
