




KV Circuit breaker boxes 3-54 modules



KV 9236

- 36 modules: 2 x 18 x 18 mm





- 2-row
- per PE/N number x cross section 8 x 25 mm², 32 x 4 mm² Cu, FIXCONNECT[®] terminal technology, for terminal technology refer to technical data
- N separable, up to 4 different potentials
- for the installation of DIN rail equipment up to 63 A, top hat profile 35 mm
- with transparent door
- for door locking device and sealing device refer to accessories
- with cable entry cover
- with blanking strips for unused DIN rail openings
- cable entry via integrated elastic membranes
- degree of protection: IP 65
- colour: grey, RAL 7035


rated insulation voltage	U _i = 400 V a.c.
power dissipation capability	P _{de} = 38 watts at 30 K according to EN 60670-24
protection class	II
material	PS (Polystyrene)
width	403 mm
height	483 mm
depth	129 mm
weight	3,564 kg

Drawings

Dimension drawing

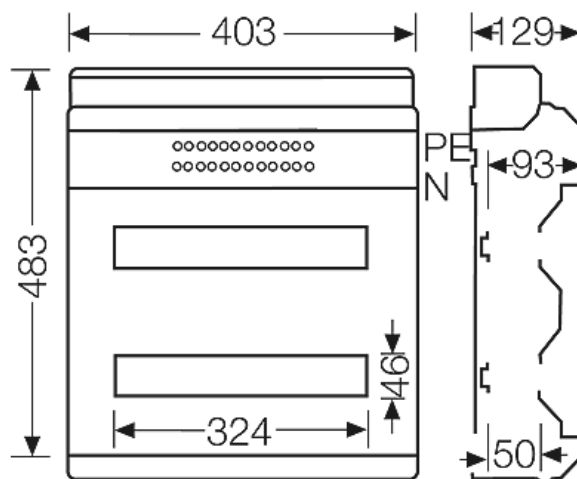



KV Circuit breaker boxes 3-54 modules




KV 9236

- 36 modules: 2 x 18 x 18 mm

Detail mass

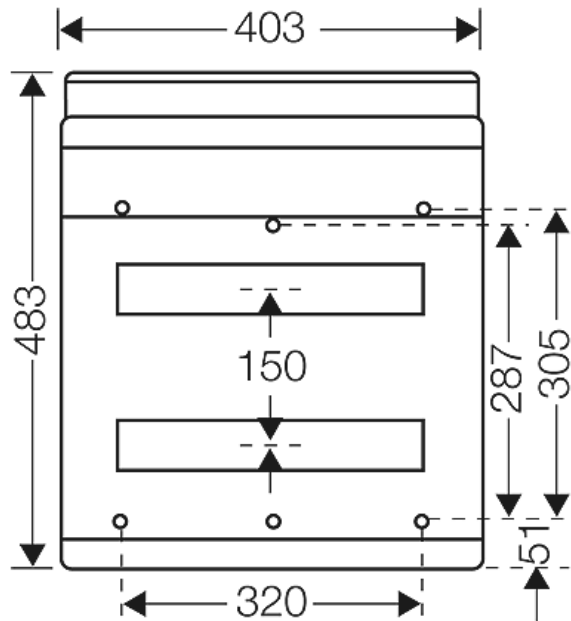




Box walls

- 8xø7-12 mm
- 8xø7-14 mm
- 4xø12-20 mm
- 1xø16,5-29 mm
- 8xøM20
- 8xø7-12 mm
- 8xø7-14 mm
- 4xø12-20 mm
- 1xø16,5-29 mm
- 8xøM20

Operating and ambient conditions

Application area	<p>IP 54/65 design: Suitable for indoor installation and outdoor installation, protected against weather influences</p> <p>IP 40/41 design: Suitable for installation in dry indoor areas</p> <p>However, pay attention to the climatic effects on the installed equipment, for example, high or low ambient temperatures or formation of condensed water see technical information</p>
Ambient temperature	<p>Average value over 24 hours + 35 °C</p> <p>Maximum value + 40 °C</p> <p>Minimum value - 5 °C</p>
Relative humidity	<p>50% at 40° C</p> <p>short-time</p>

KV Circuit breaker boxes 3-54 modules

	<p>KV 9236</p>		
<ul style="list-style-type: none"> • 36 modules: 2 x 18 x 18 mm 			

<p>Fire protection in the event of internal faults</p>	<p>100% at 25° C</p> <p>Demands placed on electrical devices from standards and laws Minimum requirements</p> <ul style="list-style-type: none"> - Glow wire test in accordance with IEC 60695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position
<p>Burning behaviour</p>	<p>Glow wire test IEC 60695-2-11: 750 °C</p> <p>UL Subject 94: V-2</p> <p>flame-retardant</p> <p>self-extinguishing</p>
<p>Degree of protection against mechanical load</p>	<p>IK08 (5 Joule)</p>
<p>Toxic behaviour</p>	<p>halogen-free</p> <p>silicone-free</p> <p>"halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 60754-2</p>
<p>Note:</p>	<p>For material properties see technical data.</p>