




KV extra circuit-breaker boxes with space for electrical devices not to be manually actuated



KV 9330 M

- 24 modules: 2 x 12 x 18 mm
- without PE and N terminal





- 2-row
- order PE/N terminals separately
- for the installation of DIN rail equipment up to 63 A, top hat profile 35 mm
- with additional space for electrical devices not to be manually actuated
- with 1 DIN rail, 273 mm wide, for DIN rail equipment and terminal blocks with max. mounting depth 72 mm
- with transparent door
- for door locking device and sealing device refer to accessories
- with cable entry cover
- with blanking strips for unused DIN rail openings
- knockouts: top and bottom walls 4 x M20, 2 x M20/25 and 1 x M32 each
- degree of protection: IP 65
- colour: grey, RAL 7035


| | |
|-------------------------------|---|
| rated insulation voltage | $U_i = 400 \text{ V a.c.}$ |
| power dissipation capability | $P_{de} = 31 \text{ watts at } 30 \text{ K according to EN 60670-24}$ |
| permissible power dissipation | $P_{zul} = 25 \text{ watts at } 30 \text{ K according to DIN 43871}$ |
| protection class | II |
| material | PS (Polystyrene) |
| width | 295 mm |
| height | 583 mm |
| depth | 129 mm |
| weight | 3,06 kg |

Drawings


Dimension drawing

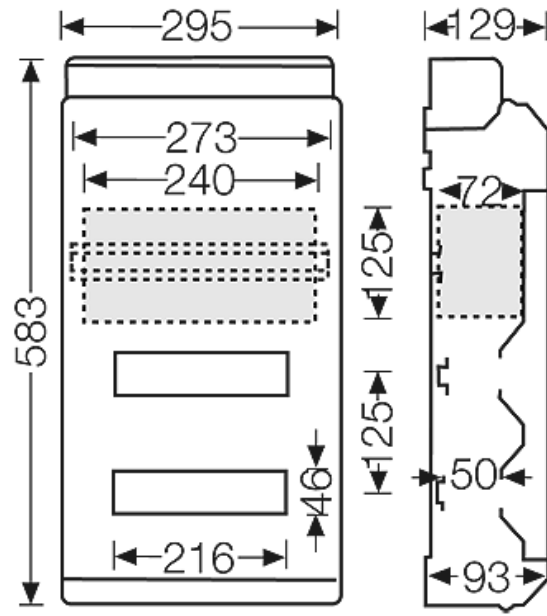

Detail mass

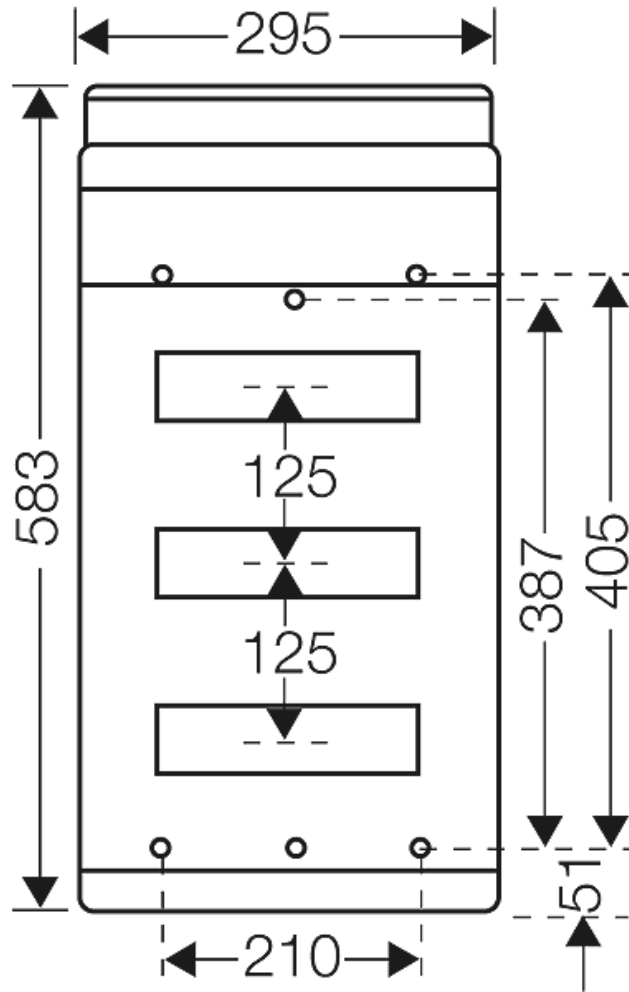

Box walls

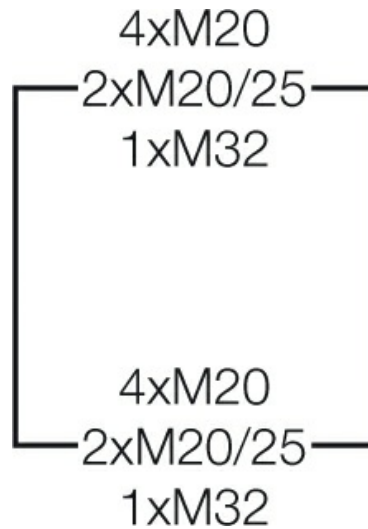

Operating and ambient conditions

Application area

IP 54/65 design: Suitable for indoor installation and outdoor installation, protected against weather influences
 IP 40/41 design: Suitable for installation in dry indoor areas
 However, pay attention to the climatic effects on the installed equipment, for example, high or low ambient temperatures or formation of condensed water see technical information

| | |
|---|--|
| Ambient temperature | Average value over 24 hours + 35 °C Maximum value + 40 °C Minimum value - 5 °C |
| Relative humidity | 50% at 40° C short-time 100% at 25° C |
| Fire protection in the event of internal faults | Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire test in accordance with IEC 60695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position |
| Burning behaviour | Glow wire test IEC 60695-2-11: 750 °C UL Subject 94: V-2 flame-retardant self-extinguishing |
| Degree of protection against mechanical load | IK08 (5 Joule) |
| Toxic behaviour | halogen-free silicone-free "halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 60754-2 |
| Note: | For material properties see technical data. |