

Technical data sheet

Combination arrester, 1-pole NPE



Item no. 5096865



Combination arrester, type 1+2, N+PE for use in TN-S and TT networks.


MCD 125-B/NPE: Coordinated N-PE spark gap, type 1+2 to EN 61643-11. For interface 0 to 2 (LPZ) in accordance with lightning protection zone concept to IEC 61312-1 and/or VDE 0185-305.

- Arresting capacity 125 kA (10/350 μs)
- Conforms to VDE-AR-N 4100
- Incl. plug caps for labelling the connections
- Protection level < 1.5 kV, allows device protection
- Encapsulated, non-extinguishing spark gap

Application: Industrial systems and buildings with external lightning protection of Classes I to IV.



Dimensions

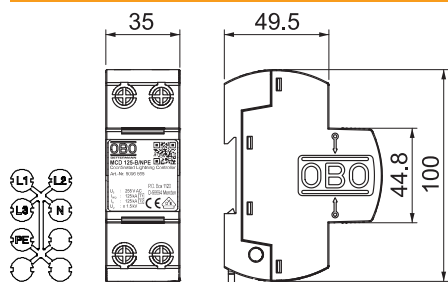

Length	100,00 mm
Width	35,00 mm
Height	69,00 mm

Master data

Item no.	5096865
Type	MCD 125-B NPE
Description 1	Coordinated Lightning Controller
Description 2	for N to PE
Dimension	255V
Smallest sales unit (VG)	1,00 Piece
Weight	46,50 kg/100 pc.


Technical data sheet

Combination arrester, 1-pole NPE

Item no. 5096865



Technical data

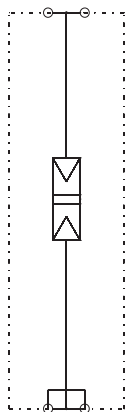

SPD to EN 61643-11	Type 1+2
SPD to IEC 61643-11	Class I+II
Test class, type 1	<input checked="" type="checkbox"/>
Test class, type 2	<input checked="" type="checkbox"/>
Nominal voltage	230,00 V
Maximum continuous voltage AC	255,00 V
Max. continuous operating voltage	255,00 V
Maximum continuous voltage (N-PE)	255,00 V
Nominal discharge current (8/20)	125 kA
Nominal discharge current (8/20 µs) [N-PE]	125,00 kA
Rated current	125,00 A
Impulse discharge current (10/350)	125,00 kA
Lightning impulse current (10/350) (N-PE)	125,00 kA
Lightning surge current (10/350)	125,00 kA
Arrester surge current (8/20) [total]	125,00 kA
Protection level (N-PE)	< 1,5 kV
Follow current quenching capacity (eff) [N-PE]	0,10 kA
Follow current quenching capacity left	0,10 kA
Response time	<100 ns
Temperature range	-40+85 °C
Pole version	N/PE
Pole number	1,00
Version	1-pole; 255 V
Version	NPE
Mounting type	Hat rail 35 mm
Installation type	DIN rail 35 mm
Protection rating	IP20
Protection rating	IP 20
Approvals	VDE
Blow-out	<input type="checkbox"/>
Size	2 part units
Division unit TE (17.5 mm)	2
Remote signalling	<input type="checkbox"/>
Telecommunications contact	<input type="checkbox"/>
Connection cross-section, flexible	10,00 - 25,00 mm ²
Connection cross-section, rigid	10,00 - 50,00 mm ²
Connection cross-section, multi-wire	10,00 - 35,00 mm ²
Signalling on device	None