


## RI-CT242 Series

### Three Phase Moulded Case Current Transformers



- From 60A to 250A Primary currents
- 5A Secondary output
- Sealable terminal cover
- Supplied with DIN Rail mounting clip, Busbar fixings and mounting feet
- Compact design
- Indication of primary current flow (arrows on case body)
- 21 x 25mm busbar/cable apertures
- 35mm bar centres
- 105mm width

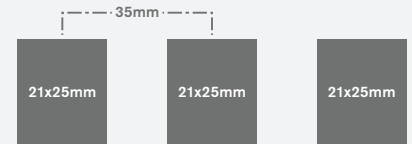

#### Product Description

The RI-CT242 Series forms part of a family of solid core three phase moulded case current transformers from Rayleigh Instruments.

These transformers are suitable for monitoring current flow in commercial, industrial or utility applications. They are designed to connect any standard metering or relay product requiring a 5A output and are available with Primary current input ranges from 60A to 250A.

The RI-CT242 Series have been designed to fit a standard moulded case breaker size and are supplied with DIN rail clip, busbar mounting clamp and fixing feet. They also have clear markings moulded into the case to indicate the correct direction of primary current flow to minimise installation errors.

#### Parameters

Primary Current A	Burden			Order Code
	Class 0.5 VA	Class 1 VA	Class 3 VA	
60	–	1	2	0060
100	–	1.5	3	0100
125	–	2	3	0125
150	1.5	2.5	3	0150
160	1.5	2.5	3	0160
200	1.5	2.5	3	0200
250	1.5	2.5	3	0250

Available with 5A Secondary

## Rated Standard

Rated Primary Current ( $I_{pr}$ )	60...250A
Frequency Range ( $f_R$ )	47...63Hz
Rated continuous over current ( $I_{cth}$ )	1.2 x rated current
Rated short time thermal current ( $I_{th}$ )	<60 $I_n$
Rated dynamic current ( $I_{dyn}$ )	2.5 $I_{th}$
Instrument security factor (FS)	≤5
Rated Secondary output ( $I_{sr}$ )	5A
Accuracy class	Class 0.5, 1 and 3 to IEC/EN61869-2

## Insulation

Insulation type	Dry transformer, air insulation; Class B
Highest voltage ( $U_m$ )	0.72kV r.m.s.
Rated insulation level	3kV r.m.s. 50Hz/1 min

## Environmental Conditions

Reference temperature	23°C ±1°C
Nominal temperature range	-20°C...40°C
Daily mean temperature	≤30°C
Limit temperature range for storage	-40°C...85°C
Relative humidity	≤85% non condensing


## Housing

Housing material	Self extinguishing polycarbonate
Protection degree (IEC/EN60529)	IP40 housing, Terminals IP20
Mounting	Foot mounting, or snap on 35mm DIN rail mounting
Weight	≤550g

## Connections

Primary winding	Passing cable
Secondary winding	Screw clamp connection - 6mm <sup>2</sup> Max.

## Dimensions (mm)

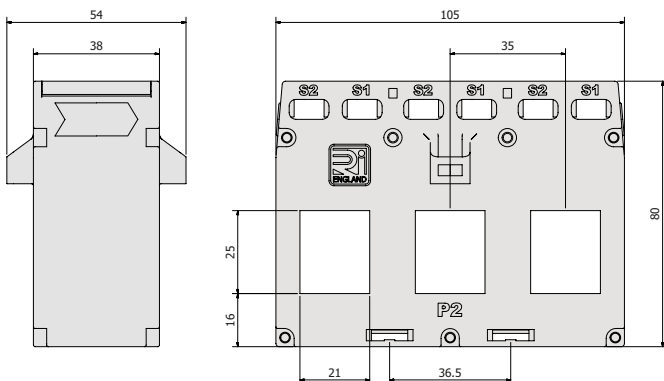

## Accessories

The RI-CT242 series of current transformers come supplied with a robust DIN rail clip, busbar mounting clamp and fixing feet.



## Information Required with Order

Build your order number - example	RI-CT242 5A 0250
Model	
Secondary Current	
Primary Current Range - See Parameters Table 'Order Code'	