


SKM

Accessories

Tubing-Clamp, pipe holder with through hole for fastening with screws

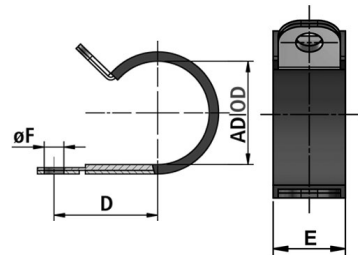

**Temperature:** -40°C ... +120°C

**Material:** galvanized steel | rubber-profile

CHARACTERISTICS:

- Properties: with through hole for fastening with screws



Characteristics	Unit	Value	Test
<b>Thermal characteristics</b>			
Temperature range	°C	-40°C ... +120°C	

FLEXA No.	OD [mm]	Ø F [mm]	D [mm]	E [mm]	Weight [kg/100]	PU [pcs.]
10308000007	10,0	5,0	15,5	15,0	0,380	50
10308012013	13,0	5,5	19,0	15,0	0,420	50
10308000009	14,0	5,0	19,0	15,0	0,460	50
10308012016	15,8	5,5	28,0	15,0	0,640	50
10308000011	17,0	5,0	22,0	15,0	0,810	50
10308012019	18,5	5,5	25,0	16,0	0,830	50
10308000013	19,0 - 20,0	5,0	25,0	16,0	0,860	50
10308000016	21,0 - 22,0	5,0	22,0	15,5	0,930	50
10308000021	27,0 - 29,0	6,0	35,0	18,0	2,040	50
10308000029	34,5 - 36,0	6,0	40,0	18,5	4,380	50
10308000036	42,5 - 45,0	6,0	50,0	18,5	7,980	25
10308000048	54,5 - 57,0	6,0	74,5	18,5	10,430	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.