

Technical data sheet

Surge arrester, 3-pole with fuse monitoring 280 V

Item no. 5096251



Surge arrester, type 2, ready for connection with remote signalling and voltage monitoring


- Complete unit consisting of upper part and base, pre-mounted and ready for connection
- Suitable for TN network systems
- With voltage monitoring of phases and function monitoring of arrester upper parts
- With remote signalling and potential-free changeover contact
- Plug-in upper part; upper part can be separated from base without tools
- Incl. thermal and dynamic cut-off unit
- With visual display of defects
- High current conductivity and long service life



Additional product text 1

* Complete = cover and base

Dimensions

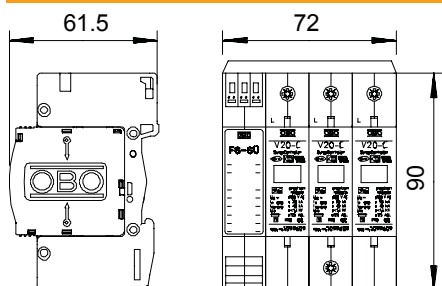

Master data

Item no.	5096251
Type	V20-C 3+FS-SÜ
Description 1	SurgeController V20
Description 2	with safety monitoring
Dimension	280V
Smallest sales unit (VG)	1,00 Piece
Weight	45,00 kg/100 pc.


Technical data sheet

Surge arrester, 3-pole with fuse monitoring 280 V

Item no. 5096251



Technical data

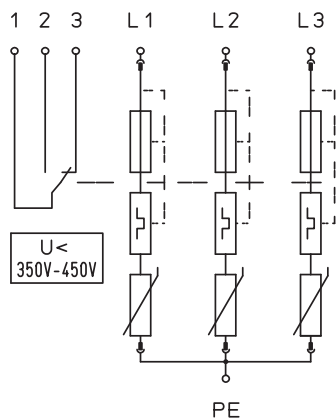

SPD to EN 61643-11	Type 2
SPD to IEC 61643-11	Class II
Test class, type 2	<input checked="" type="checkbox"/>
Nominal voltage	230,00 V
Maximum continuous voltage AC	280,00 V
Max. continuous operating voltage	280,00 V
Nominal discharge current (8/20)	20 kA
Nominal discharge current (8/20 µs) [L-N]	20,00 kA
Maximum discharge current (8/20 µs)	40,00 kA
Arrestor surge current (8/20) [total]	60,00 kA
Protection level	< 1,3 kV
Response time	< 25 ns
Maximum back-up fuse	125,00 A
Temperature range	-40+80 °C
Pole version	3
Version	3-pole with FS-SÜ; 280 V
Version	3-pole
Mounting type	Hat rail 35 mm
Installation type	DIN rail 35 mm
Protection rating	IP20
Protection rating	IP 20
Blow-out	<input type="checkbox"/>
Size	4 part units
Division unit TE (17.5 mm)	4
Remote signalling	<input type="checkbox"/>
Telecommunications contact	<input checked="" type="checkbox"/>
Integrated back-up fuse	<input type="checkbox"/>
Max. cable cross-section flexible (fine-wire)	25,00 mm ²
Max. cable cross-section rigid (single wire/multi-wire)	35,00 mm ²
Connection cross-section, flexible	2,50 - 25,00 mm ²
Connection cross-section, rigid	2,50 - 35,00 mm ²
Connection cross-section, multi-wire	2,50 - 35,00 mm ²
Signalling on device	Visual