

# Technical data sheet

## Grounding clamp

Item no. 6016694



The connection and earthing terminal is used to reduce electrical resistance and therefore improves the electric conductivity in GRM mesh cable systems in the area of the joint. This allows fulfilment of the high demands in terms of the transition resistance according to, for example, NEMA and CSA. Furthermore, the connection and earthing terminal is compulsory when used as a protective conductor in a mesh cable tray system (national regulations have to be followed when creating such a system).



St	Steel
FS	Strip galvanised

### Master data

Item no.	6016694
Type	VEK-GRM 3.9 FS
Description 1	Connection and earthing clamp
Description 2	for GR-Magic
Dimension	42x19x11
Material	Steel
Material symbol	St
Surface	Strip galvanised
Surface to DIN	DIN EN 10346
Surface symbol	FS
Smallest sales unit (VG)	25,00 Piece
Weight	3,85 kg/100 pc.


# Technical data sheet

## Grounding clamp

Item no. 6016694



### Technical data

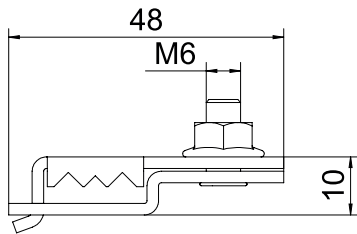

Side height | 11,00 mm

