





Z-8AI 8-CH ANALOG INPUT MODULE/ RS485 MODBUS RTU



TECHNICAL DATA

GENERAL DATA	
Power Supply	10..40 Vdc / 19..28 Vac / 50-60 Hz
Power Consumption	0,5 W
Isolation	1.500 Vac (3 way)
Power Transducers	-
Status Indicators	Power supply Error Data transmission Data reception
Protection Degree	IP20
THERMOMECHANICAL FEATURES	
Operating Temperature	-20..+65°C
Dimension	17,5 x 100 x 112 mm
Weight	About 140 g
Housing	Nylon 6 with 30% glass-fiber, V0 self-extinguished class
Connections	Removable terminals block, plug in connectors, max wire size 2.5 mm ²
Mounting	35 mm DIN rail guide 46277
COMMUNICATION, PROCESSING, MEMORY	
Interfaces	2 wires RS485 RS232 (DB9 Jack stereo 3.5 mm)
Speed	Up to 115.200 bps
Protocol	ModBUS RTU slave
Communication Time	< 10 ms (@ 38400 baud)
Distance	up to 1.200 m
Connectivity	Max 32 nodes
Data Memory	EEPROM for the configuration parameters, retention time 10 years
SIGNALS, MEASUREMENT; CONFIGURATIONS, NORMS	
Channels	8
Type	Programmable bipolar input voltage(±2,5 Vdc, ±10 Vdc, impedance >100 kΩ)or current (±20mA)
Resolution	16 bit
Accuracy	0.1%
Thermal Drift	0,01%/°C
Programming	Z-NET4 (IEC 61131 software) EASY SETUP(plug&play software) DIP switches
Norms & Approvals	UL-UR, CE, EN50081-2, EN 55011, EN 50082-2, EN 61000-2-2/4, EN 50140/141, EN 61010-1, EN 60742

APPLICATION EXAMPLE

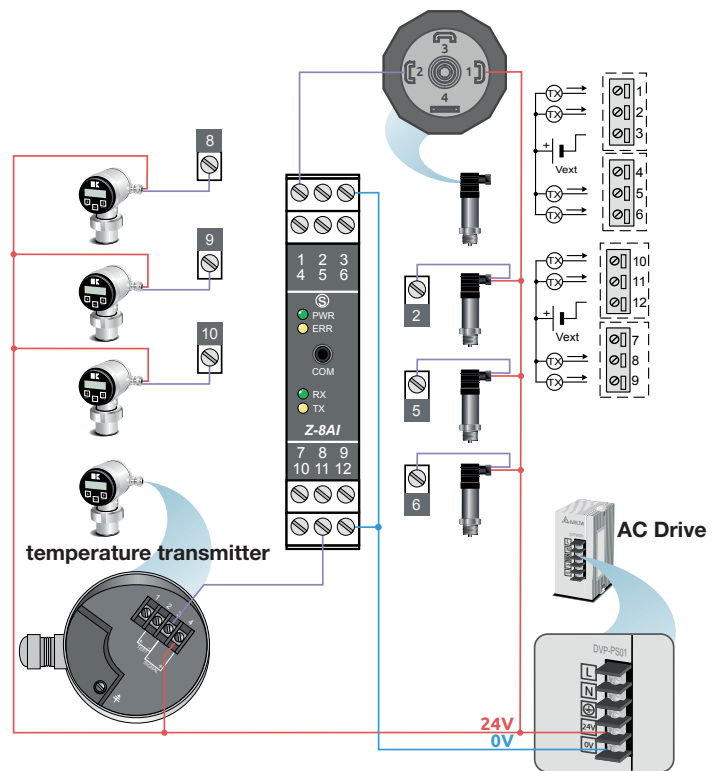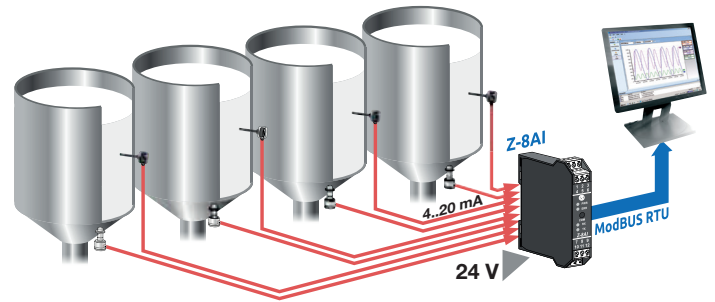

ORDER CODES

Code	Description
Z-8AI	8-CH analog input module/ RS485 MODBUS RTU
Software	pag. 41
Accessories	pag. 45