



Approved for intrinsic fire resistance, material: Thermoplastic


	<p><b>EDKF 32</b></p> <ul style="list-style-type: none"> <li>• Grommets</li> <li>• for knockouts M 32</li> </ul>	
---	--	---

- sealing range: Ø 8-23 mm
- bore-hole: Ø 32.5 mm
- wall thickness 1.5-3.5 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60695-2-11: 750 °C
- degree of protection: IP 65 / IP 66
- colour: orange, RAL 2003

material	TPE (-25° to +80°C)
weight	0,007 kg
glow wire test	IEC 60695-2-11 750°C

**Drawings**

Dimension drawing

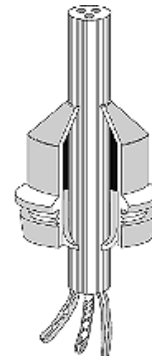

**Operating and ambient conditions**

Application area	Suitable for indoor installation and outdoor installation, protected against weather influences
Ambient temperature	Average value over 24 hours + 35 °C Maximum value + 40 °C Minimum value - 25 °C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire text in accordance with IEC 60695-2-11: - 650° C for boxes and cable glands
Burning behaviour	Glow wire test IEC 60695-2-11: 750 °C UL Subject 94: - flame-retardant self-extinguishing

Toxic behaviour

halogen-free  
silicone-free  
"halogen-free" in accordance with the examination of the  
cables and insulated wires - corrosiveness of fumes - as  
per IEC 60754-2

Note:

For material properties see technical data.